



# Telog Ru-35

## WIRELESS MULTI-CHANNEL RECORDING TELEMETRY UNIT FOR UNDERGROUND MONITORING



### UNDERGROUND MONITORING IN HARSH ENVIRONMENTS

The Telog Ru-35 provides real-time monitoring and alarming of flow, pressure and water quality instruments and sensors found in the harsh environments of sewers and underground water vaults. When you combine the Telog Ru-35 RTU with a Trimble Telog software option, you have a powerful system of wireless wastewater infrastructure monitoring that is consistently delivering real-time data and alarms from the field, straight to your desktop or browser. This enables Situational Awareness of the performance of the collection system, improves regulatory compliance and enables network modeling calibration.

#### Sensor Support

The Telog Ru-35 supports multiple sensor interface options including RS-232, RS-485, analog and digital inputs with MODBUS, SDI-12 and I2C protocol support. For example, when connected to an open-channel flowmeter via RS-232, the RTU can interrogate the meter for its most recent level, flow velocity and battery voltage measurements. Trimble Telog also provide optional sensors that may be directly attached to the Telog Ru-35 including ultrasonic and pressure level, water quality Sondes, temperature, level switches and rain gauges.

#### Wireless Communication

Using cellular technology enables unmanned monitoring of remote sites as well as instant updates and alarm notifications. The Ru-35 uses a low power, 4G LTE/Cat 1 cellular communication modem certified on multiple cellular systems. This ensures maximum coverage, reliability of service and alignment with cellular carriers technology roadmaps.

#### Collecting Data

The Telog Ru-35 may be configured to call its host server on a schedule (e.g. once per day; every four hours, etc.) and/or in response to site alarm conditions (e.g. in response to a high level event). Data may be stored in the recorder at user defined intervals (e.g. five minutes, one minute, etc.) without concern for data loss, because the recorder will store from 150,000 to 670,000 values, depending on input type, before overwriting the oldest data.

#### Packaging

The cellular modem, antenna, process signal conditioning, data recorder and battery are integrated into an IP68 rated, environmentally rugged package weighing nine pounds (four Kg) and measuring cuboid 7.3" (185mm) L x 4.2" (107mm) W x 11.5" (292mm)H.

#### Battery Powered

This RTU is powered by dual user replaceable 6-volt lantern batteries providing an operating life of six months to two years depending on the sensor interface and call schedules.

#### Software Support

Trimble Telog wireless recorders are compatible with all Telog software applications, including Telog Online (cloud), Trimble Unity, Telog Enterprise and Telogers for Windows application software. This ensures that utilities have a complete solution addressing all their remote monitoring requirements delivered in a manner that suits each individual utility's operations and IT needs.

### Applications


- ▶ Monitoring of popular open-channel wastewater flow meters
- ▶ Level monitoring
- ▶ Water quality sensors and sondes monitoring

### Benefits

- ▶ Real-time situational awareness of overflows and high/low level events
- ▶ Model asset performance, reduce overflows and pollution
- ▶ Increased regulatory compliance
- ▶ Reduced confined space entries with wireless configuration

### Features

- ▶ Wireless communication via 4G LTE cellular and Bluetooth Low Energy
- ▶ Alarm notification
- ▶ Time stamped events
- ▶ User programmable
- ▶ IP68 Rating

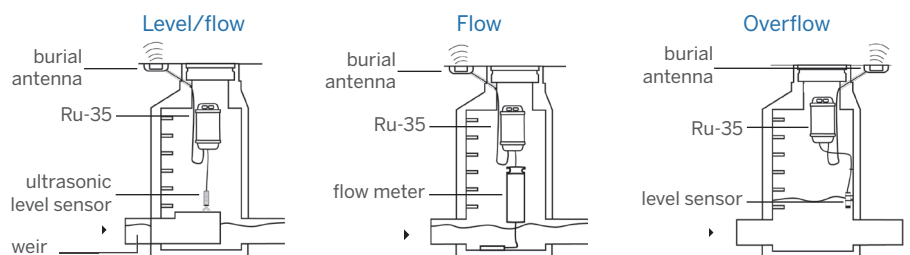

# Telog Ru-35 WIRELESS MULTI-CHANNEL RECORDING TELEMETRY UNIT FOR UNDERGROUND MONITORING

**RECORDER MODEL: Telog Ru-35**

<b>Type</b>	Multi-channel underground RTU (Recording Telemetry Unit)
<b>Recording</b>	
Sample rate	Programmable from 1/sec up to 8 hours; each channel
Data interval	Programmable from 1/sec up to 8 hours; each channel
<b>Memory</b>	
Size:	1 MB
Storage method	Wrap around (first-in; first-out),
Data capacity	Dynamically allocated to active channels, any combination of:
Analog input	670,000 values
Pulse input	500,000 values
Event input	150,000 values
ComSensor input	250,000 values
	(Values above represent maximum.)
<b>Communication</b>	
Standard:	Bluetooth Low Energy (BLE) for local connection with computer
Backup:	Wired local RS-232 via sensor port, auto-selected baud rate to 115Kbps
Cellular	Internal Telog WM2/L embedded LTE category 1 modem certified on Sprint & Verizon in USA WM2/H HSPA modem certified on Bell in Canada
Antenna:	TNC connector
<b>Inputs</b>	Limited to two ComSensors + two analog + two digital
ComSensor/meter	Selectable RS-232 or RS-485 to 115 Kbps
	Modbus
	SDI-12
	I2C
	Protocol determined by meter or sensor
Analog (Two channels)	
Selectable ranges	0-5 VDC, 4-20 ma
Excitation	Pulsed +5 or +12 VDC, (selectable duration)
Resolution	0.025%; 12 bits
Accuracy	±0.1% of full range at 70° F ±50 ppm
Digital (Two channels)	
Type	Selectable pulse counter or event recorder
Input	Contact closure or logic driven input
Excitation	3 VDC at 10 µAmps (max)
Pulse width	10 mS minimum
<b>Battery</b>	
Factory installed	Dual 6V alkaline lantern battery
	Rayovac 6-Volt Spring Terminals Alkaline F Cell   808
Battery Life Example:	
Input ComSensor	Modbus
Sample rate	Five minutes
Communication	Wireless LTE/1
Call schedule	
15 minutes	Battery life=6 months
60 minutes	Battery life=20 months
2 hours	Battery life=30 months
24 hours	Battery life=48 months
External Power Input	9 to 15 VDC @ 1 amp max
<b>Enclosure</b>	
Cuboid	7.3"L x 4.2"W x 11.5"H [185mmL x 107mmW x 292mmH]
Two Chambers	Battery and sealed electronics
Weight	9 lbs. [4Kg]
Material	Injection molded polycarbonate
<b>Environmental</b>	
Temperature	32 to 160°F [0 to 70°C] -22 to +160°F powered externally
Submersible	Meets IP68 (NEMA 6P) standards -22 to +160°F [-30 to 70°C] powered externally

**Support Software**

S-3PC	Telogers for Windows® version 6.60 or later
S-3EP	Telog® Enterprise version 6.60 or later
DHS-Service	Telog Online
TW-UNITY	Trimble Unity

**TRIMBLE TELOG SUPPLIED SENSORS**

**Pressure Level Sensor**

Model: Telog PT-DSu

<b>Type</b>	Strain gauge pressure sensor
Range Selectable	5, 10, 30, 100, 300, 1000 PSIG
Accuracy over the calibrated temperature range including zero and span setting and the effects of non-linearity, hysteresis and repeatability:	0.25% FS
Cable:	Vented Polyurethane 0.225" diameter [5.715mm]

**Ultrasonic Level Sensor**

Model: Telog UT-35u/95 ultrasonic transmitter (ComSensor)

Frequency	95 KHz
Range	one foot to 13 feet
Beam Angle	8° conical
Accuracy	±0.25% over any range segment exceeding 12 inches (homogeneous environment)

**FloWav Area Velocity and Level Sensor**

Model: PSA-35-AV A/V Level sensor

Range	Velocity: -5 to 20 ft/s Depth : 0 to 15 feet
Accuracy	Velocity: +/-2% of reading Depth: +/-0.25% full scale +/-1% of reading from 32° F to 160° F
Size	0.9"H x 1.85"W x 6"L with 30 feet of cable

**TRIMBLE TELOG SUPPORTED METERS AND SENSORS**

Flow meters

Via RS-232 or RS-485: ADS Flow Shark, ADS Triton, ADS Triton+  
Hach FL900 Flow Meter

Interface to meter: Hach Sigma 900 Series

Serial interface port: ISCO 2100 Series  
Hach Flo-Dar & Flo-Tote3 Sensors/Meters  
ISCO ADFM & accQmin

Level Sensors

Sensors: Via RS-232 or RS-485: FloWav Stingray (Level)  
Hydrolab Sondes  
Hach Pipe Sonde

Water Quality: Hach Hydrolab Multiparameter Sondes  
DataSonde 4a, MiniSonde 4a  
DS5X, DS5, MS5  
Hach Pipe Sonde  
Ponsel C4E & CZTN (Conductivity)

© 2018, Telog® is a registered trademark and Telogers™ is a trademark of Telog, A Trimble Company. Windows® is a registered trademark of Microsoft Corporation. Specifications within this brochure are subject to change without notification. (10/2018)



A TRIMBLE COMPANY

830 Canning Parkway  
Victor, NY 14564 USA  
Phone: 585.742.3000  
Fax: 585.742.3006  
TrimbleWater\_ContactUs@trimble.com  
www.trimblewater.com

